

FORM PTO-1399 (Modified)  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

217127US2PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

**09/926780**INTERNATIONAL APPLICATION NO.  
**PCT/CH99/00267**INTERNATIONAL FILING DATE  
**18 June 1999**PRIORITY DATE CLAIMED  
**none**

## TITLE OF INVENTION

**SYSTEM AND METHOD FOR TRANSMITTING AND PRESENTING VIDEO DATA AND DEVICES SUITABLE THEREFOR**

APPLICANT(S) FOR DO/EO/US

**RITTER Rudolf et al.**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

**Items 13 to 20 below concern document(s) or information included:**

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

**Drawings (1 sheet)****Form PTO-1449****Amended Sheets (Pages 1, 2, 2a, 9, 10, 11, and 12)**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) <b>09/926780</b>		INTERNATIONAL APPLICATION NO. <b>PCT/CH99/00267</b>		ATTORNEY'S DOCKET NUMBER <b>217127US2PCT</b>	
--	--	--	--	---	--

24. The following fees are submitted:

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :**

<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO .....	<b>\$1040.00</b>
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .....	<b>\$890.00</b>
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO .....	<b>\$740.00</b>
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) .....	<b>\$710.00</b>
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) .....	<b>\$100.00</b>
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>	
	<b>\$890.00</b>

Surcharge of **\$130.00** for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). ☐ 20 ☐ 30

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	16 - 20 =	0	x \$18.00
Independent claims	3 - 3 =	0	x \$84.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>
<b>TOTAL OF ABOVE CALCULATIONS</b>			<b>\$890.00</b>
Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.			<b>\$0.00</b>
<b>SUBTOTAL</b>			<b>\$890.00</b>
Processing fee of <b>\$130.00</b> for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30			<b>\$0.00</b>
<b>TOTAL NATIONAL FEE</b>			<b>\$890.00</b>
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).			<input type="checkbox"/> <b>\$0.00</b>
<b>TOTAL FEES ENCLOSED</b>			<b>\$890.00</b>
Amount to be:			\$
charged			\$

a. ☒ A check in the amount of **\$890.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **15-0030**. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**Surinder Sachar**  
**Registration No. 34,423**



**22850**

SIGNATURE \_\_\_\_\_  
*Marvin J. Spivak*

NAME **Marvin J. Spivak**

REGISTRATION NUMBER **24,913**

DATE **Dec. 18 2001**

217127US-2 PCT

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF: :  
RUDOLF RITTER ET AL : ATTN: APPLICATION DIVISION  
SERIAL NO: NEW U.S. PCT APPLN :  
(BASED ON PCT/CH99/00267)  
FILED: HEREWITH :  
FOR: SYSTEM AND METHOD FOR  
TRANSMITTING AND PRESENTING  
VIDEO DATA AND DEVICES  
SUITABLE THEREFOR

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified  
application as follows:

IN THE SPECIFICATION

Please replace the title on page 1, line 1 with the following:

--TRANSMISSION AND DISPLAY OF VIDEO DATA--.

IN THE CLAIMS

1. (Amended) A system for transmitting and presenting video data, which system includes a video center with a communications module, which system includes a telecommunications network with at least one communications terminal connected thereto, the video center being set up to transmit the video data by means of the communications

module via the telecommunications network to the communications terminal, the communications terminal comprising at least one display device which presents received video data to the user of the communications terminal in a visible way and which includes an eye position tracking module which determines current eye positions of the user, and the communications terminal including an eye position feedback module which transmits the determined actual eye positions to the video center, wherein

the video display device is a virtual retinal display device which projects picture signals corresponding to the received video data onto the retina of the user,

the video center includes a database and/or a file server in which the video data are stored in digital form, and

the video center includes a video filter module, which filters the stored video data, prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected on the retina outside the fovea have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the retina, and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

2. (Amended) The system according to claim 1, wherein the telecommunications network comprises a mobile network, and the communications terminal is a mobile radio device.

3. (Amended) The system according to claim 1, wherein the video filter module has a cut-out function which filters out at least certain of the video data corresponding to the outer picture regions so that the picture region corresponding to the filtered video data is a

section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

4. (Amended) The system according to claim 1, wherein the video center includes a prediction module, which stores eye positions determined by the eye position tracking module, and which predicts a subsequent eye position on the basis of these stored eye positions.

5. (Amended) The system according to claim 4, wherein the prediction module predicts a subsequent eye position taking into consideration the video data.

6. (Amended) The system according to claim 1, wherein it includes a correction module which receives correction values from the user, stores the received correction values, and corrects eye positions, determined by the eye position tracking module, with the stored correction values.

7. (Amended) A method for transmitting and presenting video data in which method the video data are transmitted from a video center over a telecommunications network to a communications terminal and are presented there by a video display device in a visible way for the user of the communications terminal, current eye positions of the user being determined and the determined current eye positions being transmitted to the video center, wherein

the video data are obtained from a database and/or from a file server of the video center, where the video data are stored in digital form,

the video display device projects picture signals corresponding to the video data onto the retina of the user, and

the video data are filtered in the video center, prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected on the retina outside the fovea have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea of the retina, and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

8. (Amended) The method according to claim 7, wherein the telecommunications network comprises a mobile network, and the communications terminal is a mobile radio device.

9. (Amended) The method according to claim 7, wherein at least certain of the video data corresponding to the outer picture regions are filtered out so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

10. (Amended) The method according to claim 7, wherein the determined eye positions are stored in the video center, and a subsequent eye position is predicted on the basis of these stored eye positions.

11. (Original) The method according to claim 10, wherein a subsequent eye position is predicted taking into consideration the video data.

12. (Amended) The method according to claim 7, wherein correction values entered by the user are received, the received correction values are stored, and the determined eye positions are corrected with the stored correction values.

13. (Amended) A video center which includes a communications module, which is set up to receive requests for video data from communications terminals over a

telecommunications network and transmit requested video data to a respective communications terminal, wherein

it includes a database and/or a file server in which the video data are stored in digital form, and

it includes a video filter module which filters video data, prior to their transmission, on the basis of current eye positions of the user of the respective communications terminal, which eye positions are transmitted from the respective communications terminal to the video center, such that outer picture regions, corresponding to the video data, which are projected onto the retina outside the fovea, have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea of the retina, and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

14. (Amended) The video center according to claim 13, wherein the video filter module has a cut-out function which filters out at least certain of the video data corresponding to the outer picture regions so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

15. (Amended) The video center according to claim 13, wherein it includes a prediction module which stores eye positions transmitted by the respective communications terminal, and which predicts a subsequent eye position on the basis of these stored eye positions.

16. (Amended) The video center according to claim 15, wherein the prediction module predicts a subsequent eye position taking into consideration the video data.

REMARKS

Favorable consideration of this application, as presently amended, is respectfully requested.

The present preliminary amendment is submitted to amend the claims to no longer recite any reference numerals or improper multiple dependencies.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Gregory J. Maier  
Attorney of Record  
Registration No. 25,599  
Surinder Sachar  
Registration No. 34,423



**22850**

(703) 413-3000  
Fax #: (703) 413-2220  
SNS/js

I:\atty\SNS\217127US-Pre.wpd



**Marked-Up Copy**

Serial No: \_\_\_\_\_

Amendment Filed on: \_\_\_\_\_

12-18-2001

IN THE SPECIFICATION

Please replace the title on page 1, with the following:

[SYSTEM AND METHOD FOR TRANSMITTING AND PRESENTING VIDEO DATA  
AND DEVICES SUITABLE THEREFOR] ~~TRANSMISSION AND DISPLAY OF VIDEO~~  
~~DATA~~

IN THE CLAIMS

--1. (Amended) A system [(1)] for transmitting and presenting video data, which system [(1)] includes a video center [(2)] with a communications module [(21)], which system [(1)] includes a telecommunications network [(3)] with at least one communications terminal connected thereto, the video center [(2)] being set up to transmit the video data by means of the communications module [(21)] via the telecommunications network [(3)] to the communications terminal [(4)], the communications terminal [(4)] comprising at least one display device [(41)] which [present] ~~presents~~ received video data to the user of the communications terminal [(4)] in a visible way and which includes an eye position tracking module [(411)] which determines current eye positions of the user, and the communications terminal [(4)] including an eye position feedback module [(42)] which transmits the determined actual eye positions to the video center [(2)], wherein

the video display device [(41)] is a virtual retinal display device which projects picture signals corresponding to the received video data onto the retina [(51)] of the user,

the video center [(2)] includes a database [(24)] and/or a file server in which the video data are stored in digital form, and

the video center [(2)] includes a video filter module [(22)], which [filter] filters the stored video data, prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected on the retina [(51)] outside the fovea [(511)] have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the retina [(51)], and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

2. (Amended) The system [(1)] according to claim 1, wherein the telecommunications network [(3)] comprises a mobile network, and the communications terminal [(4)] is a mobile radio device.

3. (Amended) The system [(1)] according to [one of the claims 1 or 2] claim 1, wherein the video filter module [(22)] has a cut-out function [(221)] which filters out at least certain of the video data corresponding to the outer picture regions so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

4. (Amended) The system [(1)] according to [one of the claims 1 to 3] claim 1, wherein the video center [(2)] includes a prediction module [(23)], which stores eye positions determined by the eye position tracking module [(411)], and which predicts a subsequent eye position on the basis of these stored eye positions.

5. (Amended) The system [(1)] according to claim 4, wherein the prediction module [(23)] predicts a subsequent eye position taking into consideration the video data.

6. (Amended) The system [(1)] according to [one of the claims 1 to 5] claim 1, wherein it includes a correction module [(43)] which receives correction values from the user, stores the received correction values, and corrects eye positions, determined by the eye position tracking module [(411)], with the stored correction values.

7. (Amended) A method for transmitting and presenting video data in which method the video data are transmitted from a video center [(2)] over a telecommunications network [(3)] to a communications terminal [(4)] and are presented there by a video display device [(41)] in a visible way for the user of the communications terminal [(4)], current eye positions of the user being determined and the determined current eye positions being transmitted to the video center [(2)], wherein

the video data are obtained from a database [(24)] and/or from a file server of the video center [(2)], where the video data are stored in digital form,

[-] the video display device [(41)] projects picture signals corresponding to the video data onto the retina [(51)] of the user, and

[-] the video data are filtered in the video center [(2)], prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected on the retina [(51)] outside the fovea [(511)] have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea [(511)] of the retina [(51)], and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

8. (Amended) The method according to claim 7, wherein the telecommunications network [(3)] comprises a mobile network, and the communications terminal [(4)] is a mobile radio device.

9. (Amended) The method according to [one of the claims 7 or 8] claim 7, wherein at least certain of the video data corresponding to the outer picture regions are filtered out so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

10. (Amended) The method according to [one of the claims 7 to 9] claim 7, wherein the determined eye positions are stored in the video center [(2)], and a subsequent eye position is predicted on the basis of these stored eye positions.

11. (Original) The method according to claim 10, wherein a subsequent eye position is predicted taking into consideration the video data.

12. (Amended) The method according to [one of the claims 7 to 11] claim 7, wherein correction values entered by the user are received, the received correction values are stored, and the determined eye positions are corrected with the stored correction values.

13. (Amended) A video center [(2)] which includes a communications module [(21)], which is set up to receive requests for video data from communications terminals [(4)] over a telecommunications network [(3)] and transmit requested video data to a respective communications terminal [(4)], wherein

it includes a database [(24)] and/or a file server in which the video data are stored in digital form, and

it includes a video filter module [(22)] which filters video data, prior to their transmission, on the basis of current eye positions of the user of the respective communications terminal [(4)], which eye positions are transmitted from the respective communications terminal [(4)] to the video center [(2)], such that outer picture regions,

corresponding to the video data, which are projected onto the retina [(51)] outside the fovea [(511)], have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea [(511)] of the retina [(51)], and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

14. (Amended) The video center [(2)] according to claim 13, wherein the video filter module [(22)] has a cut-out function [(221)] which filters out at least certain of the video data corresponding to the outer picture regions so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

15. (Amended) The video center [(2)] according to [one of the claims 13 or 14] claim 13, wherein it includes a prediction module [(23)] which stores eye positions transmitted by the respective communications terminal [(4)], and which predicts a subsequent eye position on the basis of these stored eye positions..

16. (Amended) The video center [(2)] according to claim 15, wherein the prediction module [(23)] predicts a subsequent eye position taking into consideration the video data.--

ART 34 AMTT

1/PRTS

09/926780

JC07 Rec'd PCT/PTO 1 8 DEC 2001

**System and Method for Transmitting and Presenting Video Data and  
Devices Suitable Therefor**

This invention relates to a system and a method for transmitting and presenting video data as well as devices suitable therefor. In particular, this relates to a system and method for transmitting and presenting video data as well as devices suitable therefor according to the preamble of the respective independent claim 1, 7, 13 or 16.

Especially with the spread of the Internet, it has become more and more popular to offer over the Internet video data, i.e. files with digital data that, with suitable playback means, can be presented to the user as moving pictures, to download them from the Internet, and show them on the screen of a personal computer, or store them in a data store of a personal computer. In order to reduce the required transmission times and storage capacities for the digital video data, the video data are typically stored and transmitted in compressed form, and are decompressed before or during playback. Various standards for storing, or respectively compressing/ decompressing video data are already available, for example the various MPEG standards (Moving Picture Expert Group). Nevertheless the transmission times for video data are considered too slow by many users. Moreover, there are complaints that one is dependent upon a fixed-installed personal computer in particular during simultaneous download and visible reproduction of video data.

Described in the patent publication U.S. 4,513,317 is a system for recording and viewing video data in which both the television recording camera and the television video display can be operated with a selectable high or low resolution, i.e. with a switchable fine or coarse electron beam. With the television video display, according to U.S. 4,513,317, the line of sight of the viewer is tracked by means of an eye position tracking module, and the tracked line of sight is transmitted to the television recording camera. According to U.S. 4,513,317, the television recording camera is operated with high resolution, by means of a camera controller, in a predefined region around the focus upon which the line of sight falls, whereas the recording takes place with low resolution in the remaining areas. Regions with high resolution and

**AMENDED PAGE**

regions with low resolution are shown by the television recording camera according to U.S. 4,513,317 with different voltage values. On the basis of these different voltage values, the video signals received by the television video display, according to U.S. 4,513,317, are correspondingly displayed with high or low resolution.

It is an object of this invention to propose a new and better system, a new and better method and suitable devices for transmitting and presenting video data which in particular make possible shorter transmission times during transmission over a telecommunications network.

This object is achieved according to the invention in particular through the elements of the independent claims. Further advantageous embodiments follow moreover from the dependent claims and from the description.

In the system for transmitting and presenting video data which includes a video center with a communications module as well as a telecommunications network with at least one communications terminal connected thereto, the video center being able to transmit by means of the communications module video data via the telecommunications network to a communications terminal, this communications terminal comprising at least one video display device that presents received video data to the user of the communications terminal in a visible way, and which includes an eye position tracking module that determines current eye positions of the user, and the communications terminal including an eye position feedback module that transmits the determined current eye positions to the video center, this object is achieved through the invention in particular by the video center including a database and/or a file server with digital video data, by the video display device being a virtual retinal display device (Virtual Retinal Display, VRD), which projects picture signals corresponding to the received video data onto the retina of the said user, and by the video center including a video filter module, which filters the video data, prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected onto the retina outside the fovea, have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea of

**AMENDED PAGE**

the retina. Moreover the filtered video data therefore contain a lesser data quantity than the unfiltered video data. The advantage of this system and of the corresponding method consists in that a particular characteristic of the human eye, i.e. the fact that a small region of the retina having an optic angle of approximately  $2^\circ$ , the so-called fovea, has the sharpest vision, can be exploited in such a way that the quantity of data to be transmitted can be drastically reduced.

In an embodiment variant, the telecommunications network includes a mobile network, for instance a mobile radio network for mobile telephony, e.g. a GSM or UMTS network, and the communications terminals are mobile radio devices, for instance a mobile radio telephone or a communication-capable laptop or palmtop computer. This has the advantage that mobile users can obtain video data from the video center and view video data by means of the video display device of their mobile devices, the video center not having to be directly connected to the mobile network, but being able to be reached over the mobile network via suitable network units, such as, for example, a Mobile Switching Center (MSC) or a Short Message Service Center (SMSC).

In an embodiment variant, the video filter module has a cut-out function which filters out at least certain of the said video data corresponding to the above-mentioned outer picture regions so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture



region. This has the advantage that, in particular with a large total picture area, only those video data that are viewed by the user in detail have to be transmitted with a high resolution.

In an embodiment variant, the video center includes a prediction module  
5 which stores eye positions determined by the eye position tracking module, and which predicts a subsequent eye position on the basis of these stored eye positions. This has the advantage that the number of reports of eye positions to the video center, in particular with continuous change of the eye positions of the user, can be reduced, it being possible to increase it in the case of extreme  
10 change in eye positions, for example. In a further variant, the content of the video data can additionally be taken into consideration in the prediction of a subsequent eye position, so that the change in the eye position correlates with the movement of large and/or central objects, for instance.

In an embodiment variant, a correction module receives correction  
15 values from the user, stores received correction values, and corrects eye positions, determined by the eye position tracking module, with stored correction values. This has the advantage that the agreement of determined eye positions with the position of the fovea of the user can be adjusted by the user by entering the correction values such that the picture region with the  
20 highest resolution is actually projected on the fovea.

An embodiment of the present invention will be described in the following with reference to an example. The example of the embodiment is illustrated by the following single attached figure:

Figure 1 shows a block diagram of the system, showing schematically a  
25 video center which is connected via a telecommunications network to a communications terminal including a video display device that projects video data onto the retina of an eye.

The reference numeral 1 in Figure 1 relates to a system for transmitting and presenting video data, i.e. digital data files the content of which can be  
30 shown to an interested user as moving pictures using suitable reproduction means, in which system 1 these video data are obtained from a video center 2 and are transmitted over a telecommunications network 3 to a communications terminal 4, where, through a video display device 41 of the communications

terminal 4, picture signals corresponding to the video data are projected onto the retina 51 of the eye 5 of the user of the communications terminal 4.

A video display device 41, which can project picture signals directly on the retina 51 of a viewer, a so-called virtual retinal display device (Virtual Retinal Display, VRD) has been described in the patent applications WO 94/09472 and WO 97/37339. Via a video data interface, these virtual retinal display devices can be supplied with video data, for example in the form of an RGB signal, an NTSC signal, a VGA signal or another formatted color or monochrome video or graphic signal. One skilled in the art will understand that it can be advantageous to adapt the virtual retinal display device described in the mentioned patent publications WO 94/09472 and WO 97/37339, or respectively the video data interface described there, in such a way that it is also able to receive efficiently other formats of television signals, and in particular digital video data. By means of an interface module (not shown), television signals and video data can also be suitably adapted to the video interface, however, or respectively received video data can be converted such that they are able to be applied to the video interface.

The video display device 41 and the further components of the communications terminal 4 can be implemented in a common or in separate housings, the video display device 41 being connected in a first housing via a wired or via a wireless interface to components in the second housing, for instance.

By means of this communications terminal 4, a user of the communications terminal 4 can request and obtain video data from the video center 2 over the telecommunications network 3. The video center 2 is based, for example, on a commercially available communications server having a communications module 21 with the necessary hardware and software components to communicate with communications terminals 2 over telecommunications networks 3. The telecommunications network 3 comprises, for example, a fixed network, for instance the public switched telephone network or a network based on the Internet Protocol (IP), and/or a mobile radio network, for example a GSM or UMTS network, with which mobile radio network the video center 2 is connected, for instance via network units (not shown), e.g. via a Mobile Switching Center (MSC) or a Short Message Service

Center (SMSC). In the embodiment variant in which the telecommunications network 3 comprises a mobile radio network, at least certain of the communications terminals 4 are mobile radio devices, for example mobile radio telephones or communication-capable laptop or palmtop computers, which, for instance with the aid of SMS messages (Short Message Services), USSD messages (Unstructured Supplementary Services Data), GPRS services (Generalized Packet Radio Service) or according to a suitable protocol, are able to exchange data over the mobile radio network via the user information channel.

Selection commands and instructions, entered by the user of the communications terminal 4 by means of its operating elements 44 and transmitted to the video center 2 over the telecommunications network, are received there by the communications module 21 and further processed so that, for example, video data in a database 24 or from a file server of the video center 2 requested by the user are obtained and are transmitted over the telecommunications network 3 to the communications terminal 4 of the user. For example by means of a browser, for instance an Internet browser for direct access to the Internet or a browser based on WAP (Wireless Application Protocol), the user can look over the titles of available video data and request desired video data, and, for instance, pause, wind back or forwards, restart and terminate the transmission of the desired video data. The database 24, respectively the file server, can be implemented on a common computer together with other components of the video center 2 or on a separate computer. Depending upon the embodiment of the above-mentioned video data interface of the virtual retinal display device 41, the communications terminal 4 can include an interface module (mentioned above) (not shown), which interface module suitably adapts the video data received from the video center 2 to the video data interface, or respectively converts received video data such that they are able to be applied to the video data interface. A suitable adaptation of the video data for the video data interface of the virtual retinal display device can also take place in the video center 2.

As shown schematically in Figure 1, the video display device 41 includes an eye position tracking module 411, which determines current eye positions of the viewer and is able to transmit them via the above-mentioned, or an additional, wired or wireless interface to an eye position feedback module 42 of

the communications terminal 4. An eye position tracking module (eye tracker) which determines current eye positions based on the position of the pupil 52 of a viewer, has also been described in the above-mentioned patent application WO 94/09472, and can be extended by one skilled in the art such that the determined eye position is available for components outside the video display device 41 via a suitable interface; depending upon the embodiment, values for both eyes can be made available. The eye position feedback module 42 of the communications terminal 4, for example a programmed software module that is executed on a processor of the communications terminal 4, transmits determined current eye positions of the viewer over the telecommunications network 3, with the aid of communications services of the communications terminal 4, to the video center 2. The transmitted current eye positions are received in the video center 2 by the communications module 21, and are passed on to the video filter module 22.

In the video filter module 22, which can be executed as a programmed software module, for instance, and/or with a suitable signal processing processor, the video data to be transmitted are filtered on the basis of received, current eye positions of the respective user such that the outer picture regions, corresponding to the said video data, which are projected through the virtual retinal display device 41 onto the retina 51 of the user outside the fovea 511, have a lower resolution than inner picture regions, corresponding to these video data, that are projected on the fovea 511 of the retina 51. The particular characteristic of the human eye 5, i.e. the fact that a small region of the retina 51 having an optic angle of approximately  $2^\circ$ , the so-called fovea, has the sharpest vision, is thereby exploited such that only the picture areas that are actually projected on the fovea 511 are transmitted with their, possibly very detailed, high resolution whereas the resolution, or respectively the detailed content, of picture regions projected outside the fovea 511 are filtered, and the data quantity for filtered video data can thereby be drastically reduced in comparison to unfiltered video data.

In an embodiment variant, the video filter module 22 has a cut-out-function 221 that can filter video data such that certain picture regions, corresponding to the video data, are filtered out, based on current eye positions. Thus, for example, at least certain video data corresponding to a defined portion of the above-mentioned outer picture regions can be filtered

out, so that the picture region corresponding to the filtered video data is a section of the picture region corresponding to the unfiltered video data, this section containing at least the above-mentioned inner picture region. In this way only those video data corresponding to picture regions viewed in detail by the user have to be transmitted, which, particularly in the case of large total picture areas, drastically reduces the data quantity to be transmitted for filtered video data compared to unfiltered video data.

When the filtered video data are transmitted from the video center 2 via the telecommunications network 3 to the communications terminal 4 and are projected there by the virtual retinal display device 41 onto the retina 51 of the respective user, the user can intervene in a correcting way if the inner picture region with high resolution, respectively with high detailed content, if applicable, is not projected on the fovea 511, i.e. if the projected picture is not perceived by the user as being projected in a sharp way. For this purpose, the communications terminal 4 includes a correction module 43, which is able to receive and store correction values, for instance horizontal and vertical distance indications, entered by the user, for example by means of the operating elements 44, for instance with left, right, up and down arrow keys, and which corrects the eye positions, determined by the eye position tracking module 411, with stored correction values before they are transmitted to the video center 2, so that the picture area with the highest resolution, and if applicable with the highest detail content, is actually projected on the fovea 511. Determined eye positions and the position of the fovea 511 of the user can thereby be brought into accord individually by the user, the individual correction values being stored, for example, on a chipcard 45 of the communications terminal 4, for instance an SIM card (Subscriber Identification Module), which can be removed from the communications terminal 4. The correction module 43 is, for example, a programmed software module which can be executed on a processor of the communications terminal 4, for instance a processor on a chipcard 45 of the communications terminal 4.

Current, if applicable corrected, eye positions received in the video center 2 can be stored there, for example by a prediction module 23. The prediction module, for instance a programmed software module, determines the next eye position to be expected from the series of previously stored current eye positions, for example by means of suitable regression functions.

Particularly in the case of continual change in the eye positions of the user, the number of reports of eye positions by the communications terminal 4 to the video center 2 can thereby be reduced, for example. In order to transmit extreme changes in the eye positions immediately to the video center 2, the eye position feedback module 42 in the communications terminal 2 <sic. 4>, can detect, for instance, a sharp difference between a first determined eye position and the subsequent second determined eye position, can transmit this second determined eye position immediately to the video center 2, e.g. starting from a predefined threshold value. In predicting expected next eye positions, the prediction module 23 can additionally take into consideration the content of the respective video data, in a further variant, so that, for instance, the expected change in eye position correlates with the movement of large and/or central objects in the pictures corresponding to video data. To carry out this last variant, it can be advantageous, for example, to analyze respective video data in advance with suitable image processing means such that their pictorial content can be described in abstract form, for instance through object designations, vectors and/or data on coordinates. Such abstract content descriptions can be stored in the database 24, for instance together with the respective video data, and can be supplied to the prediction module 23.

A user can be charged for obtaining video information, e.g. directly against a prepaid monetary amount stored on the chipcard 5, through a bank account, by credit card or by invoice, for example as part of the telephone bill, the billing being per time unit of obtained video information, per obtained title and/or in combination with a subscription, for instance. The sale or leasing of described system components can also be of commercial interest, for example a complete communications terminal 4 as described, an expansion set with the necessary components to extend a conventional communications terminal into a described communications terminal 4, also comprising in particular a data carrier with programmed eye position feedback module 42 and correction module 43 stored thereon, or a data carrier with programmed communications module 21 stored thereon, video filter module 22 as well as prediction module 23 in order to operate a conventional communications server as the described video center 2, having the hardware components required by the communications module 21, as well as a video database 24 and/or a file server.

## Claims

1. A system (1) for transmitting and presenting video data, which system (1) includes a video center (2) with a communications module (21), which system (1) includes a telecommunications network (3) with at least one communications terminal connected thereto, the video center (2) being set up to transmit the video data by means of the communications module (21) via the telecommunications network (3) to the communications terminal (4), the communications terminal (4) comprising at least one display device (41) which present received video data to the user of the communications terminal (4) in a visible way and which includes an eye position tracking module (411) which determines current eye positions of the user, and the communications terminal (4) including an eye position feedback module (42) which transmits the determined actual eye positions to the video center (2), wherein
  - the video display device (41) is a virtual retinal display device which projects picture signals corresponding to the received video data onto the retina (51) of the user,
  - the video center (2) includes a database (24) and/or a file server in which the video data are stored in digital form, and
  - the video center (2) includes a video filter module (22), which filter the stored video data , prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected on the retina (51) outside the fovea (511) have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the retina (51), and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.
2. The system (1) according to claim 1, wherein the telecommunications network (3) comprises a mobile network, and the communications terminal (4) is a mobile radio device.
3. The system (1) according to one of the claims 1 or 2, wherein the video filter module (22) has a cut-out function (221) which filters out at least

**AMENDED PAGE**

certain of the video data corresponding to the outer picture regions so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

4. The system (1) according to one of the claims 1 to 3, wherein the video center (2) includes a prediction module (23), which stores eye positions determined by the eye position tracking module (411), and which predicts a subsequent eye position on the basis of these stored eye positions.

5. The system (1) according to claim 4, wherein the prediction module  
10 (23) predicts a subsequent eye position taking into consideration the video  
data.

6. The system (1) according to one of the claims 1 to 5, wherein it includes a correction module (43) which receives correction values from the user, stores the received correction values, and corrects eye positions, determined by the eye position tracking module (411), with the stored correction values.

7. A method for transmitting and presenting video data in which method the video data are transmitted from a video center (2) over a telecommunications network (3) to a communications terminal (4) and are presented there by a video display device (41) in a visible way for the user of the communications terminal (4), current eye positions of the user being determined and the determined current eye positions being transmitted to the video center (2), wherein

the video data are obtained from a database (24) and/or from a file  
25 server of the video center (2), where the video data are stored in digital form.

- the video display device (41) projects picture signals corresponding to the video data onto the retina (51) of the user, and

- the video data are filtered in the video center (2), prior to their transmission, on the basis of received current eye positions such that outer picture regions, corresponding to the video data, which are projected on the



retina (51) outside the fovea (511) have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea (511) of the retina (51), and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

5           8. The method according to claim 7, wherein the telecommunications network (3) comprises a mobile network, and the communications terminal (4) is a mobile radio device.

10           9. The method according to one of the claims 7 or 8, wherein at least certain of the video data corresponding to the outer picture regions are filtered out so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

15           10. The method according to one of the claims 7 to 9, wherein the determined eye positions are stored in the video center (2), and a subsequent eye position is predicted on the basis of these stored eye positions.

11. The method according to claim 10, wherein a subsequent eye position is predicted taking into consideration the video data.

20           12. The method according to one of the claims 7 to 11, wherein correction values entered by the user are received, the received correction values are stored, and the determined eye positions are corrected with the stored correction values.

25           13. A video center (2) which includes a communications module (21), which is set up to receive requests for video data from communications terminals (4) over a telecommunications network (3) and transmit requested video data to a respective communications terminal (4), wherein

it includes a database (24) and/or a file server in which the video data are stored in digital form, and

30           it includes a video filter module (22) which filters video data, prior to their transmission, on the basis of current eye positions of the user of the respective communications terminal (4), which eye positions are transmitted from the respective communications terminal (4) to the video center (2), such that outer

**AMENDED PAGE**

picture regions, corresponding to the video data, which are projected onto the retina (51) outside the fovea (511), have a lower resolution than inner picture regions, corresponding to the video data, which are projected on the fovea (511) of the retina (51), and the filtered video data therefore contain a lesser quantity of data than the unfiltered video data.

14. The video center (2) according to claim 13, wherein the video filter module (22) has a cut-out function (221) which filters out at least certain of the video data corresponding to the outer picture regions so that the picture region corresponding to the filtered video data is a section from the picture region corresponding to the unfiltered video data, which section contains at least the inner picture region.

15. The video center (2) according to one of the claims 13 or 14, wherein it includes a prediction module (23) which stores eye positions transmitted by the respective communications terminal (4), and which predicts a subsequent eye position on the basis of these stored eye positions..

16. The video center (2) according to claim 15, wherein the prediction module (23) predicts a subsequent eye position taking into consideration the video data.

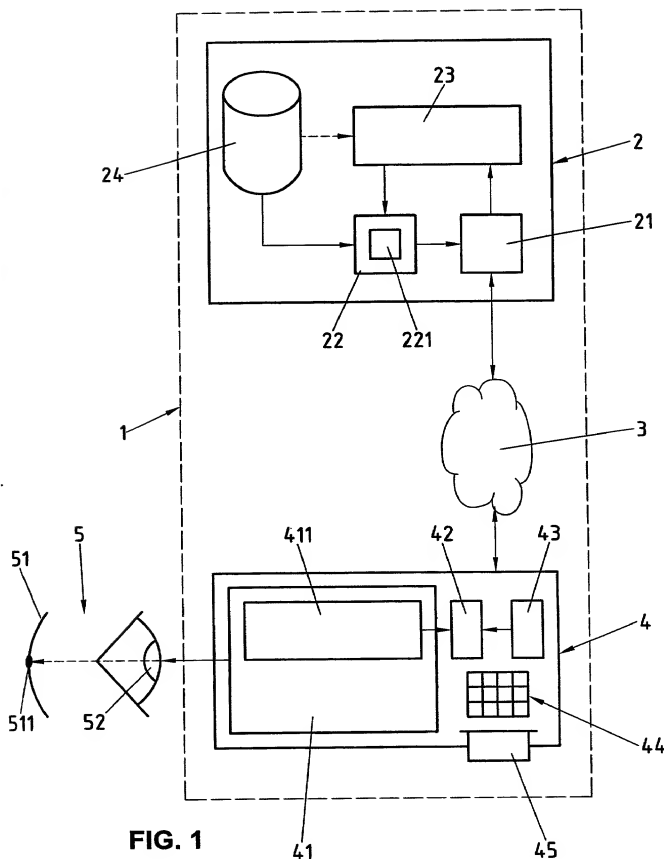


FIG. 1

0926780.121801

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

deren Beschreibung  
(zutreffendes ankreuzen)

☐ hier beigefügt ist.

☐ am \_\_\_\_\_ unter der

Anmeldungsseriennummer \_\_\_\_\_

eingereicht wurde und am \_\_\_\_\_  
abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

System and Method for Transmitting and  
Presenting Video Data and Suitable Devices  
Therefor

the specification of which

(check one)

☒ is attached hereto.

☒ was filed on 18 June 1999 as

Application Serial No. PCT/CH 99/00267

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**German Language Declaration**

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderrückunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderrückunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

**Prior Foreign Applications**  
(Frühere ausländische Anmeldungen)

(Number)	(Country)
(Number)	(Land)

(Number)	(Country)
(Number)	(Land)

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application No.)	(Filing Date)
(Aktenzeichen)	(Anmeldetag)

(Application No.)	(Filing Date)
(Aktenzeichen)	(Anmeldetag)

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

(Application No.)	(Filing Date)
(Aktenzeichen)	(Anmeldetag)

(Application No.)	(Filing Date)
(Aktenzeichen)	(Anmeldetag)

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

**Priority Not Claimed**  
**Priorität nicht beansprucht**

(Day/Month/Year Filed)	<input type="checkbox"/>
(Tag/Monat/Jahr der Anmeldung)	

(Day/Month/Year Filed)	<input type="checkbox"/>
(Tag/Monat/Jahr der Anmeldung)	

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status) (patented, pending, abandoned)	
(Status) (patentiert, schwebend, aufgegeben)	

(Status) (patented, pending, abandoned)	
(Status) (patentiert, schwebend, aufgegeben)	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent-und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Norman F. Oblon, Registration Number 24,618; Marvin J. Spivak, Registration Number 24,913; C. Irvin McClelland, Registration Number 21,124; Gregory J. Maier, Registration Number 25,599; Arthur I. Neustadt, Registration Number 24,854; Richard D. Kelly, Registration Number 27,157; James D. Hamilton, Registration Number 28,421; Eckhard H. Kuesters, Registration Number 28,870; Robert T. Pous, Registration Number 28,099; Charles L. Gholz, Registration Number 26,395; Vincent J. Sunderdick, Registration Number 29,004; William E. Beaumont, Registration Number 30,996; Steven B. Kelber, Registration Number 30,073; Robert F. Gruse, Registration Number 27,295; Jean-Paul Lavalleye, Registration Number 31,451; Stephen G. Baxter, Registration Number 32,884; Martin M. Zoltick, Registration Number 35,745; Robert W. Hahl, Registration Number 33,893; Richard L. Treanor, Registration Number 36,379; Steven P. Weinrouch, Registration Number 32,829; John T. Gookasian, Registration Number 26,142; Marc R. Labgold, Registration Number 34,651; William J. Healey, Registration Number 36,160; Richard L. Chinn, Registration Number 34,305; Steven E. Lipman, Registration Number 30,011; Carl E. Schlier, Registration Number 34,426; James J. Kubaski, Registration Number 34,648; Catherine B. Richardson, Registration Number 39,007; Richard A. Neifeld, Registration Number 35,299; and J. Derek Mason, Registration Number 35,270, with full powers of substitution and revocation.

Telefongespräche bitte richten an:  
(Name und Telefonnummer)



Direct Telephone Calls to: (name and telephone number)

(703) 413-3000

Postanschrift:

Send Correspondence to:

OBLOM, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.  
FOURTH FLOOR  
1755 JEFFERSON DAVIS HIGHWAY  
ARLINGTON, VIRGINIA 22202 U.S.A.

Voller Name des einzigen oder ursprünglichen Erfinders: <b>Rudolf RITTER</b> Unterschrift des Erfinders  Wohnsitz <b>3052 Zollikofen (Switzerland)</b> Staatsangehörigkeit <b>Switzerland</b> Postanschrift <b>Rossweidweg 8</b> <b>3052 Zollikofen (Switzerland)</b>	Full name of sole or first inventor 23.11.01 Inventor's signature  Date Residence 3052 Zollikofen (Switzerland) Citizenship Switzerland Post Office Address Rossweidweg 8 3052 Zollikofen (Switzerland)
Voller Name des zweiten Miterfinders (falls zutreffend) <b>Eric LAUPER</b> Unterschrift des Erfinders  Wohnsitz <b>3012 Bern (Switzerland)</b> Staatsangehörigkeit <b>Switzerland</b> Postanschrift <b>Hochfeldstrasse 96</b> <b>3012 Bern (Switzerland)</b>	Full name of second joint inventor, if any 23.11.01 Second Inventor's signature  Date Residence 3012 Bern (Switzerland) Citizenship Switzerland Post Office Address Hochfeldstrasse 96 3012 Bern (Switzerland)

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben.)

(Supply similar information and signature for third and subsequent joint inventors.)